

Fuel Pump FP 200-7

Photo will follow soon

- ▶ >200 l/h
- ► Max. 7,5 bar
- ▶ 850 g
- ► Fuel lines screwed
- ▶ Internal pre-filter on suction side with 300 µm

The FP 200-7 is an inline roller cell pump for the installation outside the fuel tank (installation in the tank is not proven).

It is capable of providing 200 l/h at 7 bar. Bio-fuel can be delivered up to E100 (shortens lifetime!). The FP 200-7 is compatible with Gasoline and Diesel fuel. It is the replacement for the 0580.254.044 aftermarket fuel pump with higher performance.

			- 0
Λ	nn	lica	tion
	PP	LICU	UUII

Fuel pressure	Up to 7,5 bar
Gasoline delivery rate at 5 bar and 22°C	>220 to 270 l/h
Diesel delivery rate at 7 bar and 22°C	>185 to 235 l/h
Pressure limiting valve	8,0 to 10,0 bar
Fuel compatibility	Up to E100 with shorter life- time
Diesel compatibility	Given
Operating temperature range	-40 to 80°C ≤90°C for ≤5 h over 1.000 h lifetime ≤105°C for ≤1 h over 50 h lifetime
Storage temperature range	-30 to 60°C
Max. vibration IEC 60068-2-34	10 Hz 19,4 (m/s²)²/Hz 300 Hz 0,654 (m/s²)²/Hz 1.000 Hz 0,059 (m/s²)²/Hz

Technical Specifications

Mechanical Data

Diameter	60 mm


Length 197 mm
Weight 750 g
Mounting Clamping


Electrical Data

Supply voltage	6 to 15 V (26 V for 60 s)
Operating voltage	13 V
Load current at 5 bar and 22°C	≤ 17 A

Characteristic

Color	Silver
Non-return valve	External
Fuel filtering	External, on pressure side
Over-pressure valve	Internal

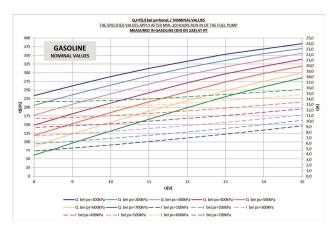

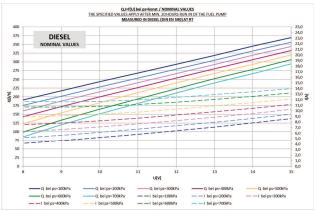

Connectors and Wires

Electrical connector +M4/-M5

Electrical mating connector With ring wire M4 and M5 Mechanical connector intake M18x1.5

side

Mechanical connector pres-M12x1.5

sure side

Installation Notes

Up to E100 with shorter lifetime

For technical reasons the values may vary.

Please use within the specified limit values only.


Please find further application hints in the offer drawing at our homepage.

Ordering Information

Fuel Pump FP 200-7

Order number 0580.464.200

Dimensions

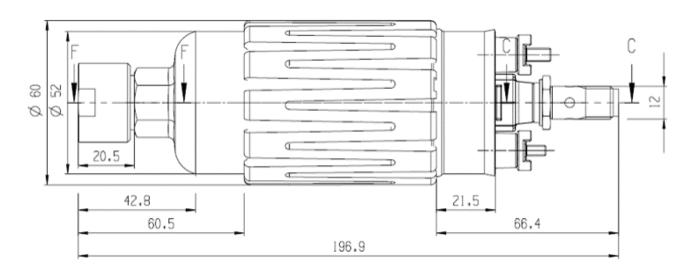

Represented by:

Europe: Bosch Engineering GmbH

BOSCH Engineering GMDH Motorsport Robert-Bosch-Allee 1 74232 Abstatt Germany Tel.: +49 7062 911 9101 Fax: +49 7062 911 79104 motorsport@bosch.com www.bosch-motorsport.de North America:

Bosch Engineering North America Bosch Engineering North America Motorsport 38000 Hills Tech Drive Farmington Hills, MI 48331-3417 United States of America Tel.: +1 248 876 2977 Fax: +1 248 876 7373 motorsport@bosch.com

www.bosch-motorsport.com

Asia-Pacific: Bosch Engineering Japan K.K.

Motorsport 18F Queen's Tower C, 2-3-5 Minato Mirai Nishi-ku, Yokohama-shi Kanagawa 220-6218

Japan Tel.: +81 45 650 5610 Fax: +81 45 650 5611 www.bosch-motorsport.jp Australia, New Zealand and South

Robert Bosch Pty. Ltd Robert Bosch Pty. Ltd Motorsport 1555 Centre Road Clayton, Victoria, 3168 Australia Tel.: +61 (3) 9541 3901 motor.sport@au.bosch.com